

2'x 2' VARI-JUST™ Volumetric Troffer



Project:

Type:

Catalog#:

Features & Benefits

- Switch-Type Field **Tunable CCT**
- Switch-Type Field **Adjustable Power**
- Isolated, Non-Flicker, external driver
- High power SMD chipset / 50,000+ hour lifespan.
- Consumes up to 50% less energy than standard fluorescent lamps
- Minimized labor costs
- LM79/LM80/TM-21 data available
- 0-10v Dimming

Description

Designed for new build and retrofit applications, START's VARI-JUST™ Volumetric Troffer Luminaires with Tunable CCT & Adjustable Power provide unsurpassed flexibility to allow field customization at the flick of a switch. Our VARI-JUST™ Luminaires are simple to install, provide superior lighting and offer in-field customization for most applications.

SPECIFICATIONS	DETAILS			
Model	GART22-RDW20D-VJ	GART22-RDW25D-VJ	GART22-RDW30D-VJ	GART22-RDW35D-VJ
Size	2ft x 2ft	2ft x 2ft	2ft x 2ft	2ft x 2ft
Input Power (W)	20W	25W	30W	35W
Power Input Voltage	120-277VAC			
Delivered Lumens (lm) @ 4000K	2500	3,125	3,750	4,275
Power Factor	≥0.95			
CRI	>80			
Color Temperature (K) {Switch Type}	3000K, 3500, 4000K, 5000K			
Dimming	Non-Flicker, 0-10V Dimming			
Certification	UL, RoHS, FCC			
Material Compliance	RoHS Compliant, Contains no Mercury			
Application Rating	Indoor Use / IP40 Damp Location Rated			
Mounting	Ceiling Grid Lay-in Mount Standard (Earthquake safety clips included)			
Operating Temperature	-4°F to 113°F			
Beam Angle / Lens	120° Beam Angle / Frosted			
Hour Lifetime (L70)	50,000			
Warranty	5 Years			

*Dimensions and specifications subject to change without notice

2'x 2' VARI-JUST™ Volumetric Troffer

2'x 2' VARI-JUST™ Volumetric Troffer Ordering


Model Number	DETAILS	Watts	CCT	Inventory Status
GAF22-RDW20D-VJ	VARI-JUST™ Flat Panel: 2'x2', 20W, 120°, 3000-5000K	20	3000-5000	Stock Item
GAF22-RDW25D-VJ	VARI-JUST™ Flat Panel: 2'x2', 25W, 120°, 3000-5000K	25	3000-5000	Stock Item
GAF22-RDW30D-VJ	VARI-JUST™ Flat Panel: 2'x2', 30W, 120°, 3000-5000K	30	3000-5000	Stock Item
GAF22-RDW35D-VJ	VARI-JUST™ Flat Panel: 2'x2', 35W, 120°, 3000-5000K	35	3000-5000	Stock Item

2'x 2' VARI-JUST™ Volumetric Troffer Options

OPTION	Option Order Code	DETAILS	Inventory Status
Mounting Options		Ceiling Grid Lay-in Mount: STANDARD	Stock Item
Safety Clips		Earthquake Safety Clips: STANDARD	Stock Item

2'x 2' VARI-JUST™ Volumetric Troffer Dimensions & Weight

Model	A (Length)	B (Width)	C (Height)	Weight (lbs)
Volumetric Troffer Luminaire: 2'x2'	23.75"	23.75"	3.10"	5.10

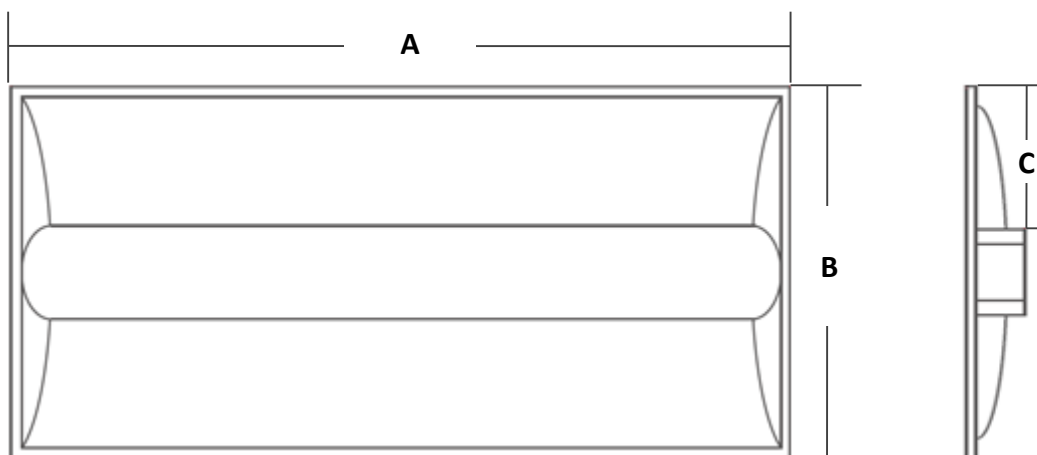

*Dimensions and specifications subject to change without notice

2'x 4' VARI-JUST™ Volumetric Troffer



Project:

Type:

Catalog#:



Features & Benefits

- Switch-Type Field **Tunable CCT**
- Switch-Type Field **Adjustable Power**
- Isolated, Non-Flicker, external driver
- High power SMD chipset / 50,000+ hour lifespan.
- Consumes up to 50% less energy than standard fluorescent lamps
- Minimized labor costs
- LM79/LM80/TM-21 data available
- 0-10v Dimming

Description

Designed for new build and retrofit applications, START's VARI-JUST™ Volumetric Troffer Luminaires with Tunable CCT & Adjustable Power provide unsurpassed flexibility to allow field customization at the flick of a switch. Our VARI-JUST™ Luminaires are simple to install, provide superior lighting and offer in-field customization for most applications.

SPECIFICATIONS	DETAILS			
Model	GART24-RDW35D-VJ	GART24-RDW40D-VJ	GART24-RDW45D-VJ	GART24-RDW50D-VJ
Size	2ft x 4ft	2ft x 4ft	2ft x 4ft	2ft x 4ft
Input Power (W)	35W	40W	45W	50W
Power Input Voltage	120-277VAC			
Delivered Lumens (lm) @ 4000K	4,375	5,000	5,625	6,250
Power Factor	≥0.95			
CRI	>80			
Color Temperature (K) {Switch Type}	3000K, 3500, 4000K, 5000K			
Dimming	Non-Flicker, 0-10V Dimming			
Certification	UL, RoHS, FCC			
Material Compliance	RoHS Compliant, Contains no Mercury			
Application Rating	Indoor Use / IP40 Damp Location Rated			
Mounting	Ceiling Grid Lay-in Mount Standard (Earthquake safety clips included)			
Operating Temperature	-4°F to 113°F			
Beam Angle / Lens	120° Beam Angle / Frosted			
Hour Lifetime (L70)	50,000			
Warranty	5 Years			

*Dimensions and specifications subject to change without notice

2'x 4' VARI-JUST™ Volumetric Troffer

2'x 4' VARI-JUST™ Volumetric Troffer Ordering


Model Number	DETAILS	Watts	CCT	Inventory Status
GAF24-RDW35D-VJ	VARI-JUST™ Flat Panel: 2'x4', 35W, 120°, 3000-5000K	35	3000-5000	Stock Item
GAF24-RDW40D-VJ	VARI-JUST™ Flat Panel: 2'x4', 40W, 120°, 3000-5000K	40	3000-5000	Stock Item
GAF24-RDW45D-VJ	VARI-JUST™ Flat Panel: 2'x4', 45W, 120°, 3000-5000K	45	3000-5000	Stock Item
GAF24-RDW50D-VJ	VARI-JUST™ Flat Panel: 2'x4', 50W, 120°, 3000-5000K	50	3000-5000	Stock Item

2'x 4' VARI-JUST™ Volumetric Troffer Options

OPTION	Option Order Code	DETAILS	Inventory Status
Mounting Options		Ceiling Grid Lay-in Mount: STANDARD	Stock Item
Safety Clips		Earthquake Safety Clips: STANDARD	Stock Item

2'x 4' VARI-JUST™ Volumetric Troffer Dimensions & Weight

Model	A (Length)	B (Width)	C (Height)	Weight (lbs)
Volumetric Troffer Luminaire: 2'x4'	47.76"	23.75"	3.65"	8.75

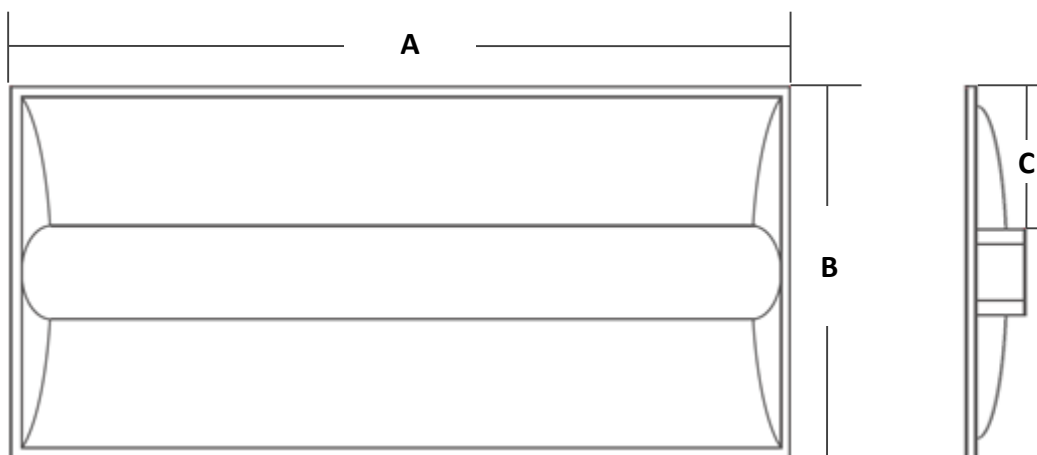

*Dimensions and specifications subject to change without notice