


2'x 2' & 2'x 4' VARI-JUST™ LED Flat Panel Series

START LIGHTING

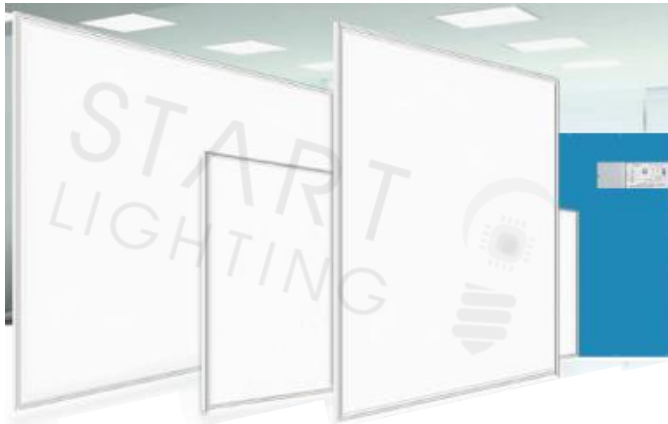

Project:

Type:

Catalog#:

Features & Benefits

- Switch-Type **Tunable CCT**
- Switch-Type Field **Adjustable Power**
- Isolated, Non-Flicker, external driver
- High power SMD chipset / 50,000+ hour lifespan.
- Consumes up to 50% less energy than standard fluorescent lamps
- Minimized labor costs
- LM79/LM80/TM-21 data available
- 0-10v Dimming

Description

Designed for new build and retrofit applications, START's VARI-JUST™ Panel Luminaires with Tunable CCT and Adjustable Power provide unsurpassed flexibility to allow field customization at the flick of a switch. Our VARI-JUST™ Luminaires are simple to install, provide superior lighting and offer in-field customization for most applications.

| SPECIFICATIONS | DETAILS | |
|-------------------------------------|---|-----------------|
| Model | GAF22-RDW45D-VJ | GAF24-RDW72D-VJ |
| Size | 2ft x 2ft | 2ft x 4ft |
| Input Power (W) {Switch Type} | 30, 35, 40, 45 | 55, 60, 65, 72 |
| Power Input Voltage | 120-277VAC | |
| Delivered Lumens (lm) @ 4000K | 3,300-4,950 | 6,050-7,920 |
| Power Factor | ≥0.95 | |
| CRI | >80 | |
| Color Temperature (K) {Switch Type} | 3000, 3500, 4000, 5000 | |
| Dimming | Non-Flicker, 0-10V Dimming | |
| Certification | UL, DLC, RoHS, FCC | |
| Material Compliance | RoHS Compliant, Contains no Mercury | |
| Application Rating | Indoor Use / IP40 Damp Location Rated | |
| Mounting | Ceiling Grid Lay-in Mount Standard (Earthquake safety clips included) | |
| Operating Temperature | -4°F to 113°F | |
| Beam Angle / Lens | 120° Beam Angle / Frosted | |
| Hour Lifetime (L70) | 50,000 | |
| Warranty | 5 Years | |

*Dimensions and specifications subject to change without notice

2'x 2' & 2'x 4' VARI-JUST™ LED Flat Panel Series

START
LIGHTING



2'x2' & 2'x4' VARI-JUST™ LED Flat Panel Series Ordering


| Model Number | DETAILS | Watts (W) | CCT (K) | Inventory Status |
|-----------------|---|-----------|-----------|------------------|
| GAF22-RDW45D-VJ | VARI-JUST™ Flat Panel: 2'x2', 30W-45W, 120°, 3000-5000K | 30-45 | 3000-5000 | Stock Item |
| GAF24-RDW72D-VJ | VARI-JUST™ Flat Panel: 2'x4', 55W-72W, 120°, 3000-5000K | 55-72 | 3000-5000 | Stock Item |

2'x2' & 2'x4' VARI-JUST™ LED Flat Panel Series Options

| OPTION | Option Order Code | DETAILS | Inventory Status |
|-----------|--|--------------------------------------|------------------|
| Mounting | HF22-SMKIT= 2'x2' Mount Kit HF24-SMKIT= 2'x4' Mount Kit | Surface Mount Kit: Optional | Stock Item |
| | GAF22-SSCBL4= 2'x2' Mount Kit GAF24-SSCBL4= 2'x4' Mount Kit | Suspension Mount Kit: Optional | Stock Item |
| EM BACKUP | STFHSCPUNV | 90 MIN External Mount Battery Backup | To Order |

2'x2' & 2'x4' VARI-JUST™ LED Flat Panel Series Dimensions & Weight

| Model | A (Length) | B (Lens L) | C (Width) | D (Lens W) | Weight (lbs) |
|--|------------|------------|-----------|------------|--------------|
| VARI-JUST™ LED Flat Panel Luminaire: 2'x2' | 23.75" | 21.97" | 23.75" | 21.97" | 7.25 |
| VARI-JUST™ LED Flat Panel Luminaire: 2'x4' | 47.76" | 45.98" | 23.75" | 21.97" | 13.90 |

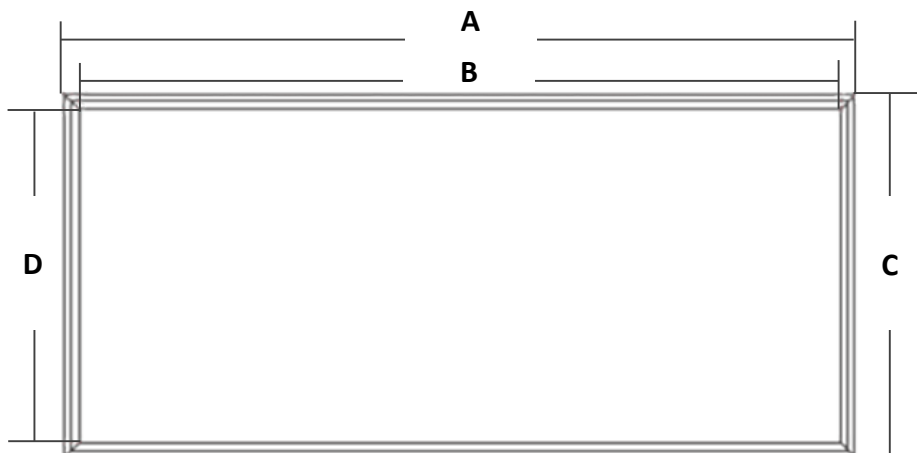

*Dimensions and specifications subject to change without notice