



Project:	
Type:	
Catalog#:	

Designed for new build and retrofit applications, START's VARI-JUST™ LED Backlit Panel Luminaires with Tunable CCT and Adjustable Power provide unsurpassed flexibility to allow field customization at the flick of a switch. Our VARI-JUST™ Luminaires are simple to install, provide superior lighting and offer in-field customization for most applications.


General Data

Fixture Type	Backlit Panel Light
Technology	High Lumen LED Light Source
Finish	White
CCT	3500K, 4000K & 5000K (Tunable)
Distribution	120°
Material-Housing	Aluminum Frame / Steel Enclosure
Material- Lens	Non-yellowing PMMA Optical Lens & PS Diffuser
Rated Hours	50,000 Hours Avg Lifetime
Warranty	5 Years
Certifications	cULus, DLC Premium, RoHS, IC Rated
Working Temp.	-4°F to 105°F
IP Rating	IP20 / Damp Location
Dimensions	47.76" (L) x 23.74" (D) x 1.60" (H)

Electrical & Performance Data

Nominal Wattage	30W, 40W & 45W (Tunable)
Input Voltage	120-277VAC
Power Factor	>0.95
SDCM / UGR	<5 / <22
Lumen Output	3,750 – 5,625
Lumen Efficacy	125lm/w
CRI	>80
Dimmability	0-10V Dimmable (10-100%)
Surge Protection	4.0kV

*Dimensions and specifications subject to change without notice.

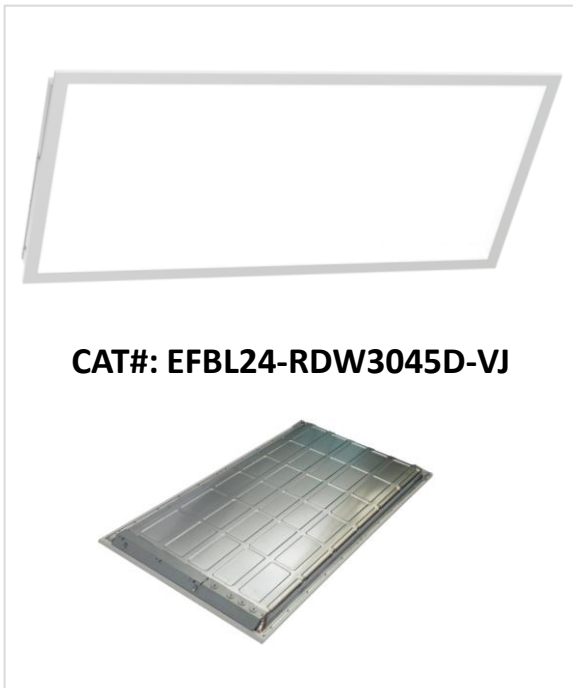

CAT#: EFBL24-RDW3045D-VJ

Features & Benefits

- Switch-Type Field Tunable CCT
- Switch-Type Field Adjustable Power
- IC Rated for insulated ceilings
- Backlit Illumination with Hi-Performance LEDs and non-yellowing PMMA optical lenses
- 50,000+ hour lifespan
- Isolated, Non-Flicker, External Driver
- Consumes up to 50% less energy than standard fluorescent lamps
- Minimized labor costs
- LM79/LM80/TM-21 data available
- 0-10v Dimming (10-100%)

Mounting Options Part No.

Ceiling Grid mount	NA / Standard
Surface Mount Kit	EFBL24-SMKT

EM Options Part No.

External EM Backup	FHEM-05
--------------------	---------

